

THE HEARTHROOM SINGLE-SIDED SERIES



Enjoy a larger viewing area, full control, and open hearth capabilities.

Available in three viewing widths: 36, 44 and 48; arched or rectangular front and doors, standard black finish, thermostatically controlled blower(s) & variable speed control.

 <p>Hearthroom 36 SS</p>	<ul style="list-style-type: none"> ■ Zero Clearance Fireplace ■ 220 CFM variable speed blower ■ Door Opening: 36"W x 21"H 	<ul style="list-style-type: none"> ■ 12" ID Round Class A Chimney, 14" OD ■ 18" x 18" space required for chimney ■ Insulated Panel Dimensions: 47"W x 45"H x 28"D ■ Zero Clearance Framing: 51"W x 49"H x 30"D ■ 9" additional space needed for combustion air duct inside wall ■ 4" Combustion Air Intake ■ Total Weight: 900lbs 	<ul style="list-style-type: none"> ■ Viewing Area: 756 sq in. ■ Firebox: 7.5 cubic feet ■ Arched or Rectangular front & doors ■ Standard black finish ■ Minimum Mantel Height: 52 1/8" (measured from the bottom of the unit) ■ Max Log Length: 36"
 <p>Hearthroom 44 SS</p>	<ul style="list-style-type: none"> ■ Zero Clearance Fireplace ■ 220 CFM variable speed blower ■ Door Opening: 44"W x 26"H 	<ul style="list-style-type: none"> ■ 14" ID Round Class A Chimney, 16" OD ■ 20" x 20" space required for chimney ■ Insulated Panel Dimensions: 54 1/2"W x 49 1/4"H x 28"D ■ Zero Clearance Framing: 58 1/2"W x 53 1/4"H x 30"D ■ 9" additional space needed for combustion air duct inside wall ■ 5" Combustion Air Intake ■ Total Weight: 1,200lbs 	<ul style="list-style-type: none"> ■ Viewing Area: 1,144 sq in. ■ Firebox: 13.2 cubic feet ■ Arched or Rectangular front & doors ■ Standard black finish ■ Minimum Mantel Height: 57 1/8" (measured from the bottom of the unit) ■ Max Log Length: 44"
 <p>Hearthroom 48 SS</p>	<ul style="list-style-type: none"> ■ Zero Clearance Fireplace ■ Dual 220 CFM variable speed blowers ■ Door Opening: 48"W x 42"H 	<ul style="list-style-type: none"> ■ 16" ID Round Class A Chimney, 18" OD ■ 22" x 22" space required for chimney ■ Insulated Panel Dimensions: 63"W x 66"H x 35 3/4"D ■ Zero Clearance Framing: 67"W x 70"H x 37 3/4"D ■ 9" additional space needed for combustion air duct inside wall ■ 6" Combustion Air Intake ■ Total Weight: 1,800lbs 	<ul style="list-style-type: none"> ■ Viewing Area: 2,016 sq in. ■ Firebox: 24.5 cubic feet ■ Arched or Rectangular front & doors ■ Standard black finish ■ Minimum Mantel Height: 73 1/8" (measured from the bottom of the unit) ■ Max Log Length: 48"

THE HEARTHROOM SEE-THROUGH SERIES



Enjoy a larger viewing area, full control, and open hearth capabilities.

Available in three viewing widths: 36, 44 and 48; arched or rectangular front and doors, standard black finish, thermostatically controlled blower(s) & variable speed control.



Hearthroom 36 ST

- Zero Clearance Fireplace
- Dual 220 CFM variable speed blowers
- Door Opening: 36"W x 21"H

- 14" ID Round Class A Chimney, 16" OD
- 20" x 20" space required for chimney
- Insulated Panel Dimensions: 51"W x 46"H x 35"D
- Zero Clearance Framing: 55"W x 50"H x 35"D
- 9" additional space needed for combustion air duct inside wall
- Dual 4" Combustion Air Intakes
- Total Weight: 1,000lbs

- Viewing Area: 1,512 sq in. (756 sq in. per side)
- Firebox: 8.75 cubic feet
- Arched or Rectangular front & doors
- Standard black finish
- Minimum Mantel Height: 52 1/8" (measured from the bottom of the unit)
- Max Log Length: 36"




Hearthroom 44 ST

- Zero Clearance Fireplace
- Dual 220 CFM variable speed blowers
- Door Opening: 44"W x 26"H

- 16" ID Round Class A Chimney, 18" OD
- 22" x 22" space required for chimney
- Insulated Panel Dimensions: 59"W x 50"H x 35"D
- Zero Clearance Framing: 63"W x 54"H x 35"D
- 9" additional space needed for combustion air duct inside wall
- Dual 5" Combustion Air Intakes
- Total Weight: 1,300lbs

- Viewing Area: 2,288 sq in. (1,144 sq in. per side)
- Firebox: 13.2 cubic feet
- Arched or Rectangular front & doors
- Standard black finish
- Minimum Mantel Height: 57 1/8" (measured from the bottom of the unit)
- Max Log Length: 44"

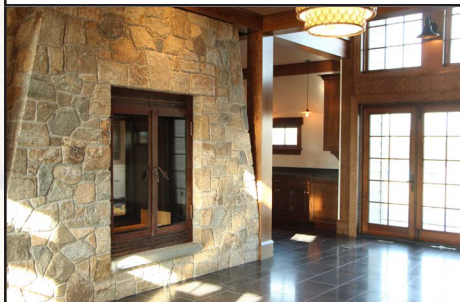

Hearthroom 48 ST

- Zero Clearance Fireplace
- Dual 220 CFM variable speed blowers
- Door Opening: 48"W x 42 1/2"H

- 18" ID Round Class A Chimney, 20" OD
- 24" x 24" space required for chimney
- Insulated Panel Dimensions: 63"W x 65 1/2"H x 42 1/2"D
- Zero Clearance Framing: 67"W x 69 1/2"H x 42 1/2"D
- 9" additional space needed for combustion air duct inside wall
- Dual 6" Combustion Air Intakes
- Total Weight: 1,900lbs

- Viewing Area: 4,032 sq in. (2,016 sq in. per side)
- Firebox: 24.5 cubic feet
- Arched or Rectangular front & doors
- Standard black finish
- Minimum Mantel Height: 73 1/8" (measured from the bottom of the unit)
- Max Log Length: 48"

THE HEARTHROOM INDOOR/OUTDOOR SERIES



Enjoy a larger viewing area, full control, and open hearth capabilities.

Available in three viewing widths: 36, 44 and 48; arched or rectangular front and doors, standard black finish, thermostatically controlled blower(s) & variable speed control.



Hearthroom 36 IO

- Zero Clearance Fireplace
- Dual 220 CFM variable speed blowers
- Door Opening: 36"W x 21"H

- 14" ID Round Class A Chimney, 16" OD
- 20" x 20" space required for chimney
- Insulated Panel Dimensions: 51"W x 46 1/8"H x 34 3/4"D
- Zero Clearance Framing: 55"W x 50 1/8"H x 34 3/4"D
- 9" additional space needed for combustion air duct inside wall
- Dual 4" Combustion Air Intakes
- Total Weight: 1,100lbs

- Viewing Area: 1,512 sq in. (756 sq in. per side)
- Firebox: 8.75 cubic feet
- Arched or Rectangular front & doors
- Standard black finish
- Minimum Mantel Height: 52 1/8" (measured from the bottom of the unit)
- Max Log Length: 36"



Hearthroom 44 IO

- Zero Clearance Fireplace
- Dual 220 CFM variable speed blowers
- Door Opening: 44"W x 26"H

- 16" ID Round Class A Chimney, 18" OD
- 22" x 22" space required for chimney
- Insulated Panel Dimensions: 59"W x 50"H x 35"D
- Zero Clearance Framing: 63"W x 54"H x 35"D
- 9" additional space needed for combustion air duct inside wall
- Dual 5" Combustion Air Intakes
- Total Weight: 1,300lbs

- Viewing Area: 2,288 sq in. (1,144 sq in. per side)
- Firebox: 13.2 cubic feet
- Arched or Rectangular front & doors
- Standard black finish
- Minimum Mantel Height: 57 1/8" (measured from the bottom of the unit)
- Max Log Length: 44"



Hearthroom 48 IO

- Zero Clearance Fireplace
- Dual 220 CFM variable speed blowers
- Door Opening: 48"W x 42"H

- 18" ID Round Class A Chimney, 20" OD
- 24" x 24" space required for chimney
- Insulated Panel Dimensions: 63"W x 66"H x 42 1/2"D
- Zero Clearance Framing: 67"W x 70"H x 42 1/2"D
- 9" additional space needed for combustion air duct inside wall
- Dual 6" Combustion Air Intakes
- Total Weight: 1,600lbs

- Viewing Area: 4,032 sq in. (2,016 sq in. per side)
- Firebox: 24.5 cubic feet
- Arched or Rectangular front & doors
- Standard black finish
- Minimum Mantel Height: 73 1/8" (measured from the bottom of the unit)
- Max Log Length: 48"